




Teximplast LLP
26-28 Bedford Row
London WC1R 4HE
United Kingdom
E-mail: info@teximplast.com



PET STRECH BLOW MOLDING MACHINE

COMPACT A4

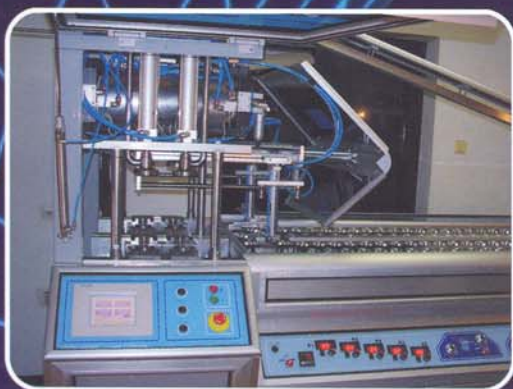

GENERAL CHARACTERISTICS

CAPACITY	2000-25000 MAX BPH 0,21
MOULD	4 CAVITY
BOTTLE VOL.	0,2-2 L
BOTTLE HEIGHT	330 MM
BOTTLE DIAMETER	100 MM
OUTER NECK DIAMETER	28 MM
LENGTH OF PREFORM	155 MM
HEATING CHAMBER	
HEATER TYPE	INFRARED
HEATER LAMPS NUMBER	5
ADJUST ZONE NUMBER	5
CLAMPING	
CLAMPING	PNEUMATIC-MECHANIC
PLATEN STROKE	130 MM
MAX. MOULD SIZE	300X166X350 MM
MOULD THICKNESS	83 MM
STRETCHING	
MAX. STRETCHING STROKE	330 MM
DISTANCE BET. STRETCHING RODS	120 MM
AIR SUPPLY	
OPERATING AIR PRESSURE	7 BAR
OPERATING AIR CONSUMPTION	955.1 L/MIN
BLOWING AIR PRESSURE	15 BAR
COOLING	
POWER	1565 W
HEAT EXCHANGE	3525 KCAL/H
EL. POWER	
OPERATING POWER	0.5 KW
HEATER POWER	13 KW
DIMENSION	
WEIGHT	1400 KG
MACHINE + PREFORM CABINE	375X130X250 CM
AIR COMPRESSOR	
CAPACITY	5100 L/MIN
PRESSURE	15 BAR
TANK VOLUME	2000 LIT
POWER	32.4 KW
WEIGHT	350 KG
DIMENSIONS	320X100X190 CM

